



VL7038IRVF 2.8-12mm Auto Iris Varifocal Lens


VL7039IRVF 6-50mm Auto Iris Varifocal Lens

Features

- 1/3" Sony™ Super-Had II™ CCD
- High Performance W-V DSP chip
- 600 TV lines resolution
- Multi-mount is a unique mount allowing installers to manipulate the camera to almost every angle with simplicity
- Zero noise and no ghosting effect with digital noise reduction (DNR)
- True day & night (ICR IR cut filter removable)
- External control rings for easy focus & distance adjustment
- Highest resolution: vivid, sharp picture in complete darkness
- Front glass heater: with thermic rays & built-in temperature sensor for immediate removal of condensation
- 5 year warranty

Specifications

Image Sensor 1/3" Sony Super-HAD II™ CCD
Resolution..... 600 TV lines
Minimum Illumination..... CDS Off 0.15 lux, CDS On 0.00003 lux
Lens..... 2.8-12mm Auto Iris Varifocal Lens
Number Of IR Leds..... 63
IR Range Up To 131'
White Balance ATW/Outdoor/Indoor/Manual
AWC (1,700°K - 11,000°K)
Gain Control High, Low, Off, Selectable
S/N Ratio More than 52dB (AGC Off, Weight On)
Backlight..... OFF / HLC / BLC / Selectable
Effective Pixels 768(H) x 494(V)
Electronic Shutter Speed..... 1/50, 1/60 sec. ~ 1/100,000 sec.
OSD..... Built-In
DNR..... Off/On (Level Adjustable)
D-WDR Indoor / Outdoor / Off
Sharpness 0~31' (Level Adjustable)
Privacy On/Off (12 Zones)
Total Pixels 811(H) x 508(V)
Scanning System..... 2:1 Interlace
Synchronization Internal
Day & Night Color/BW/AUTO/EXT
Motion Detection..... On / Off (8 Zones)

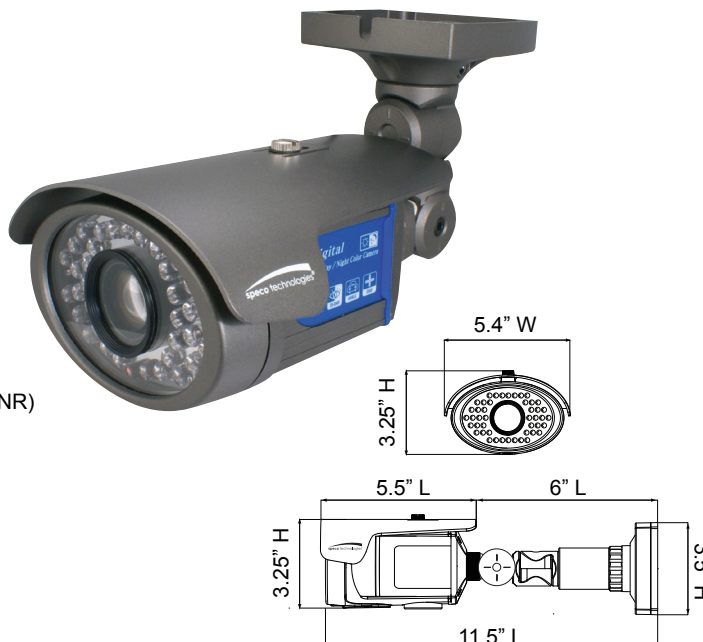

Sense-Up..... Off / Auto (Selectable Limit x2 ~ x256)
Mirror Off / Mirror / V-Rev / Rotate
Digital Zoom On (x1~ x16) / Off
Power Supply Dual Voltage (24VAC / 12VDC)
(not supplied)
Power Consumption 12VDC 220mA (CDS OFF)
700mA (CDS ON)
Heater On Adj: 220-700mA
24VAC 150mA (CDS OFF)
450mA (CDS ON)
Heater On Adj: 170-450mA
Operating Temperature/
Humidity..... 14° F ~ 122° F, RH 95% max.
Storage Temperature/
Humidity..... -4° F ~ 140° F, RH 95% max.
Dimensions..... 5.4" W x 3.25" H x 11.5" L
Weight 4 lbs.

Optional Mounting Accessories

